



FRAME ADJUSTABLE FOR 3-1/2"-8" WALL THICKNESS

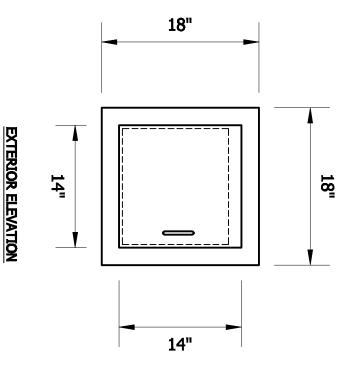

WALL OPENING REQUIRED: 16"W x 15"H

## **SELECT CORRECT SWING**



## PACKAGE PASSER **BULLET RESISTANT FIRE CLASSIFIED**

MODEL NO: NBP-PR-141418S-FR-L3

- 1 UNIT REQUIRED

- **EXTERIOR DIMENSION: 14.00" x 14.00" x 14.00"**

INTERIOR DIMENSION: 13.50" x 12.00" x 14.00"

- INTERIOR CLAMPING TRIM FRAME
- BALLISTIC RATING: LEVEL 3
- PRODUCT FINISH: BRUSHED STAINLESS STEEL

FIRE CLASSIFICATION: 'B" 1-1/2 HR

- HINGE: CONTINUOUS STAINLESS STEEL
- DOOR PULLS:

OPERATION TO REQUIRE ONE DOOR FULLY CLOSED AT ALL TIMES BOTH DOOR TO HAVE STANDARD WIRE PULL MECHANICAL INTERLOCK CONTROLS DOOR