

**TYPICAL
BP-7241E-IP INSTALLATION**

- 1) Quikserv windows must be installed level and square to work properly.
- 2) Anchor per Florida Bldg. codes anchor schedule.
- 3) 115V/15 Amp. Dedicated circuit require
- 4) Recommended height from floor to service opening to be 36".
(Check any and all local or city codes)
- 5) Silicone all exterior and interior joints.
- 6) All other type of anchoring to be approved by certified engineer.

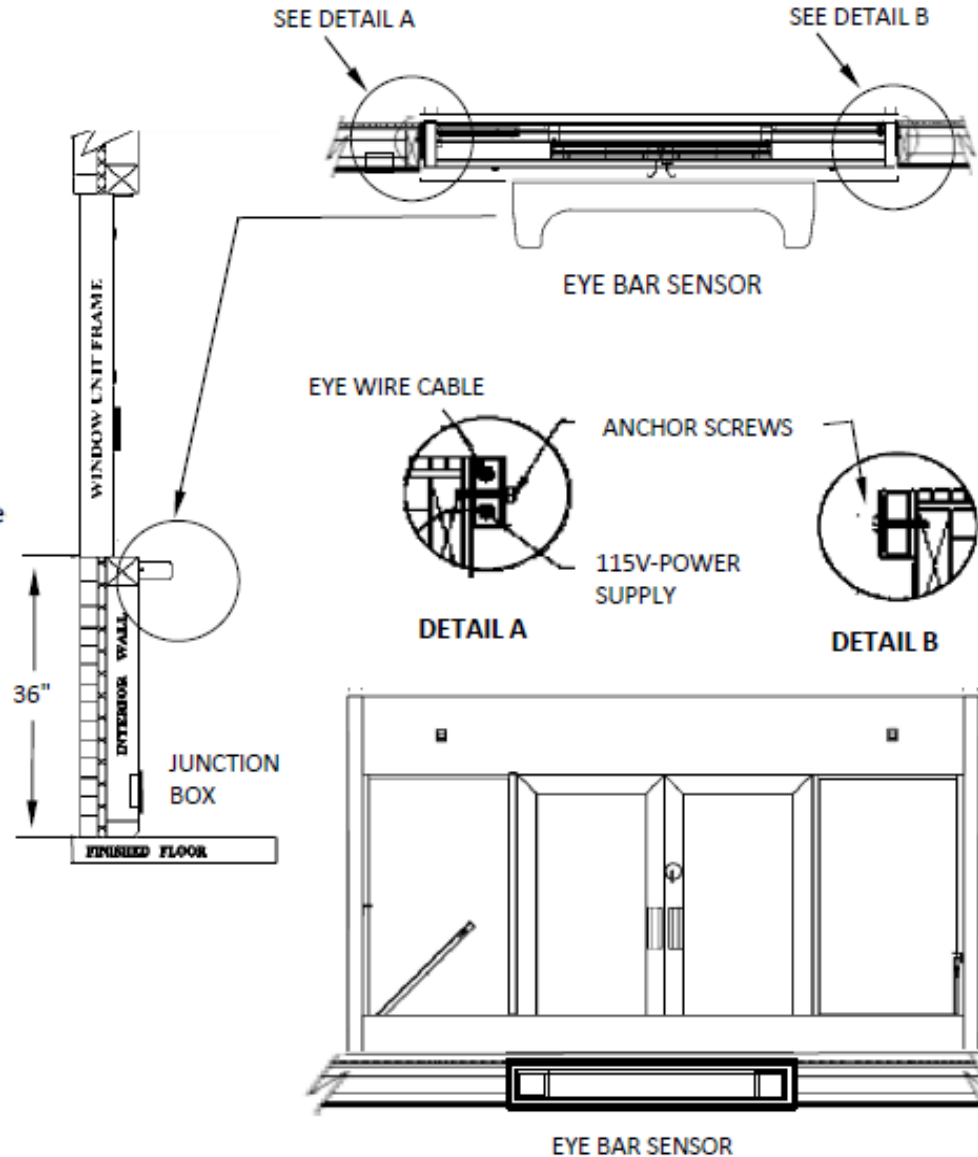


FIGURE 1

General Notes

Actual Dimension
72"(W) x 41"(H)

Dual Service Opening
29-1/2"(W) x 27"(H)
15"(W) X 27"(H)

Rough Opening
72-1/2"(W) x 41-1/2"(H)

NOTE 1:
Eye set to be mounted directly below the service opening. Bar to be mounted on the wall. (See Fig. 1)

NOTE 2:
Anchor Screws to be supplied by contractor.

NOTE 3:
Junction box to be supplied by contractor.

CAUTION:
Use caution when drilling. The power supply cable and the eye bar cable are both located in the left jamb. (See Detail A)

COVENANT
Security Equipment
9323 N. Government Way
Hayden, ID 83835

TITLE:
INSTALLATION PROCEDURE

Drawing Name
CSE-QS-BP-7241E - IP INSTALLATION DRAWING

DATE	DRAWN BY	SCALE	SHEET	SIZE
4/11/2016	RBV	NTS	1 of 1	A

NOTE: THIS DRAWING EMBODIES A CONFIDENTIAL PROPRIETY DESIGN LICENSED BY COVENANT SECURITY EQUIPMENT. IT IS SUBMITTED UNDER A CONFIDENTIAL RELATIONS ALL PATENT. MANUFACTURING AND SALE RIGHTS REGARDING THE SAME ARE RESERVED EXCEPT TO THE EXTENT RIGHTS ARE EXPRESSLY GRANTED TO OTHERS. THE RECIPIENT AGREES BY ACCEPTING HIP. THESE DRAWINGS NOT TO SUPPLY OR DISCLOSE ANY INFORMATION REGARDING THEM TO ANY UNAUTHORIZED PERSON.