


CSE-QS-TRAN-1019 Installation and Anchoring Schedule

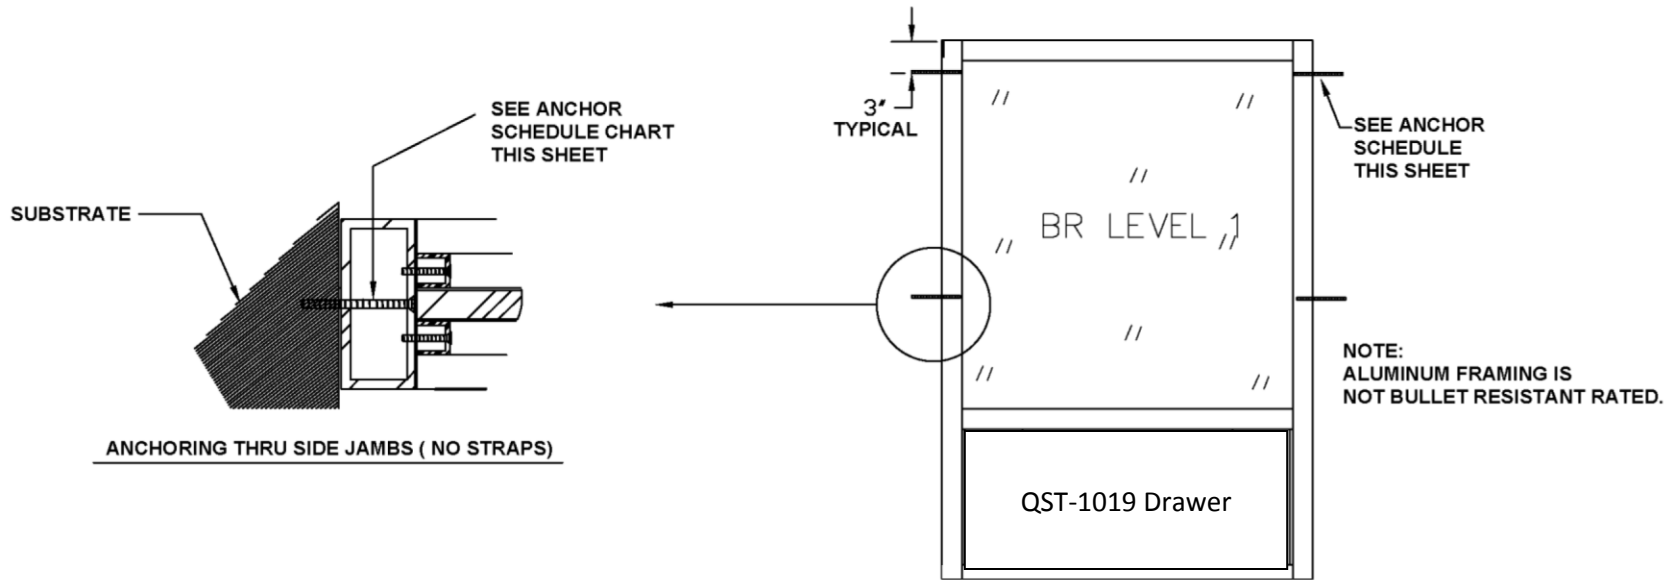

ANCHOR SCHEDULE		
SUBSTRATE	ANCHOR	MINIUM PENETRATION INTO SUBSTRATE
STEEL (16 GA. MIN.)	1/4" SHEET METAL SCREWS	MIN. PROTRUSION OF 3 THREADS BEYOND FULL ENGAGEMENT
CONCRETE	1/4" DIAMETER CONCRETE SCREW	1.25" INTO CONCRETE
WOOD BUCK	# 14 WOOD SCREW	1.50" INTO WOOD (REQUIRES DOUBLE 2X BUCK)

COVENANT
Security Equipment
9323 N Government Way
Hayden, ID 83835

ANCHOR SCHEDULE			
Aluminum Commercial Pass-Thru Window			
DRAWING DATE: 01-21-2010	SIZE FSCM NO.	DWG. NO. QSP-MINI	REV 1
DRAWN BY: BRIAN C.	NO SCALE	SHEET: 1 of 1	