



INSTALLATION PROCEDURES

- ① PROVIDE A FINISHED OPENING IN THE WALL WITH SUFFICIENT CLEARANCE TO ACCEPT THE TRANSACTION WINDOW
- ② INSTALL TRANSACTION WINDOW UNIT "a" INTO OPENING AND ANCHOR IT ONTO PLACE
- ③ INSTALL NATURAL VOICE SPACER "b" AND BOTTOM GLAZING CAP "c" INTO GLAZING
- ④ CAREFULLY SLIDE GLAZING ASSEMBLY INTO FRAME
- ⑤ INSTALL REMOVABLE STOP "d" AND SCREW "e" INTO FRAME.

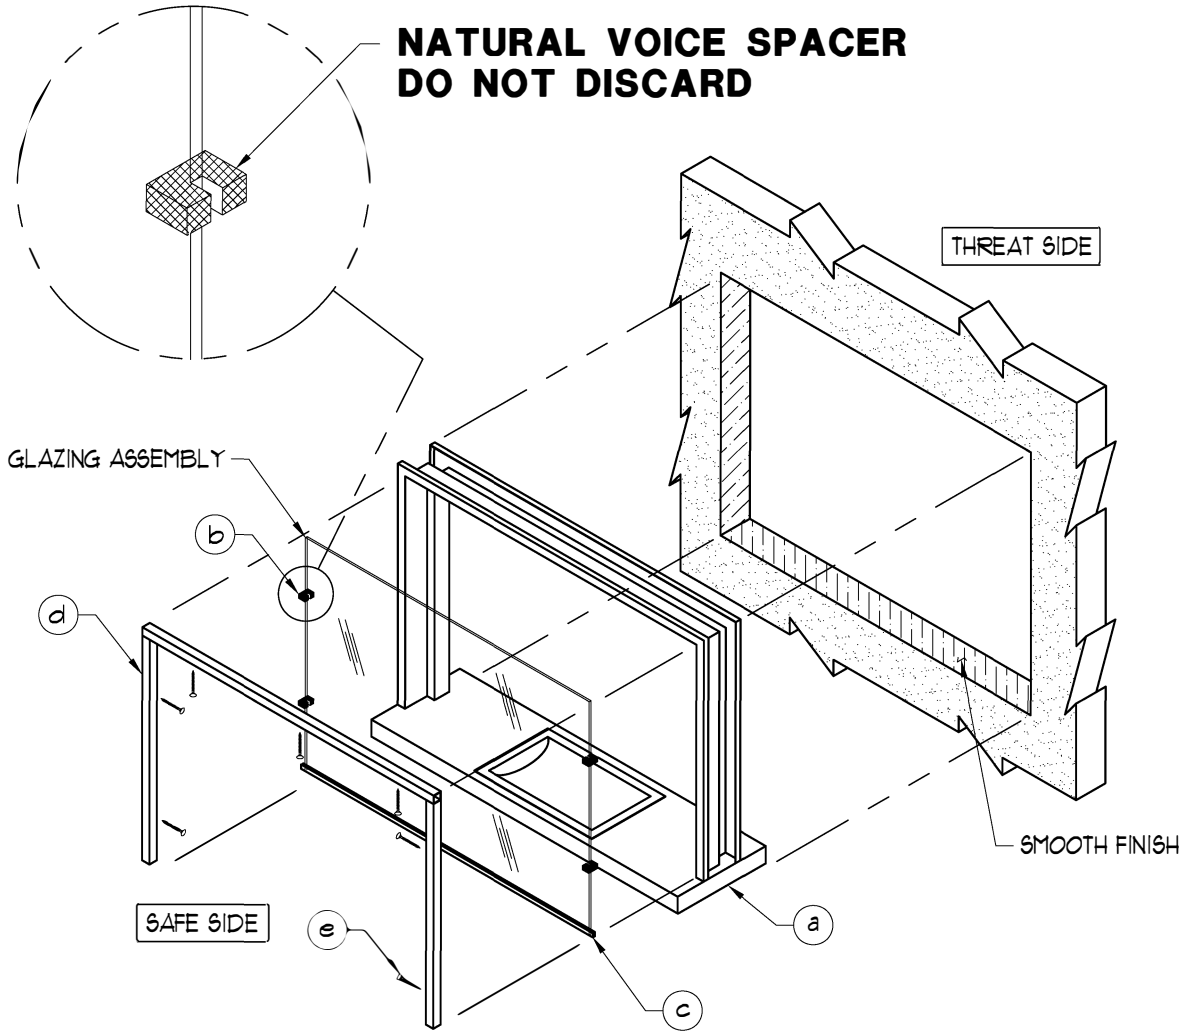

THREE SIDED HOLLOW METAL TRANSACTION WINDOW INSTALLATION
(NATURAL VOICE)

INSTALLATION\INST9502.DWG 05/22/06 @ 16:22 User: operez

REVISIONS		 COVENANT Security Equipment	BALLISTIC LEVEL	
DESCRIPTION			DRN.BY:	DATE:
		TITLE:	A. PEREZ	03-14-03
		BULLET RESISTANT TRANSACTION WINDOW INSTALLATION	CHKD.BY:	DATE:
		UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES	B. LEWIS	05-28-09
		SCALE	PROJECT No.	DRAWING No.
		NONE		SHEET
			INST9502	1 OF 1

HANDLING AND CLEANING PROCEDURES FOR COVENANT SECURITY EQUIPMENT GLAZING PRODUCTS

1. Carefully remove crates from truck, inspect for freight damage and store in a clean dry place. Damage may occur if crate and contents get wet.
2. Keep crates upright as noted on each crate.
3. Do no stack crates on top of each other.
4. Wash Polycarbonate/Acrylic with mild soap or dishwashing detergent and lukewarm water, using a clean sponge or soft cloth. Rinse well with clean water.

DO NOT use abrasive or highly alkaline cleaner on Polycarbonate/Acrylic sheet,. Never scrape Polycarbonate/Acrylic sheet with razor blades, squeegees, or other sharp instruments. Benzene, leaded gasoline, acetone, ammonia, anaerobic thread locking compounds (i.e. Loctite) or carbon tetrachloride **should never be used** on Polycarbonate/Acrylic sheet.

5. **DO NOT** use cleaning liquids that contain abrasives or powder cleaners.
6. **DO NOT** clean Polycarbonate/Acrylic sheet in hot sun or at elevated temperatures.
7. Minimizing Hairline Scratches - Scratches and minor abrasions can be minimized by using a mild automobile polish. Three such products that tend to polish and fill scratches are Johnson Paste wax, Novus Plastic Polish #1 and #2, Novus Inc., Minneapolis, MN, and Mirror Glaze plastic polish (J.G.M10), Mirror Bright Polish Co., Pasadena, CA. It is suggested that a test be made on a sample sheet with the products selected and that the polish manufacturer's instructions be followed.
8. Fresh paint splashes, grease and smeared glazing compounds can be removed before drying by rubbing lightly with a good grade of naphtha or isopropyl alcohol. A warm final wash should be made using a mild soap or detergent solution and a thorough rinse with clean water. Dry thoroughly with a chamois or moist cellulose sponge to prevent water spots.
9. Inspection of all glazing products is the responsibility of the buyer, and all damages should be reported immediately. All damaged glazing products reported after installation will be considered the result of outside forces (improper cleaning and/or handling), therefore all replacement glazing will be at the expense of others.