


SINGLE J-BOX WITH
3/4" CONDUIT AND
COVER PLATE FOR
ALARM AND VIDEO


SINGLE J-BOX WITH
3/4" CONDUIT AND
COVER PLATE FOR
120V 15A SERVICE
TO DEPOSITORY SIGN

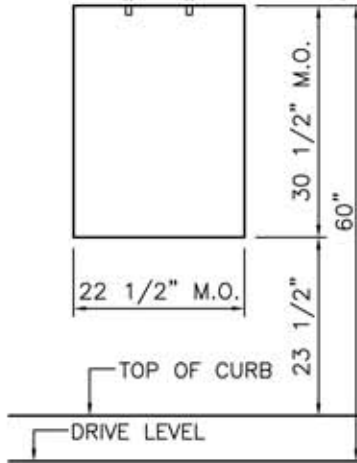


NOTE:

1. IF DRIVE LEVEL AND FINISHED FLOOR ELEVATIONS ARE NOT AS SHOWN NOTIFY FOR SPECIAL CONFIGURATION
2. RECOMMEND NIGHT DEPOSITORY SHOULD BE PLACED UNDER CANOPY
3. HIGH LIGHTING MUST BE PROVIDED
4. RECOMMEND (2) 3/8" BOLTS IN BOTTOM TO ANCHOR SAFE
5. INTERIOR WALL OPENING AROUND OUTER HOUSING IS TO BE FILLED (BY OTHERS) USING APPROPRIATE MATERIALS

WALL OPENING EXTERIOR ELEVATION

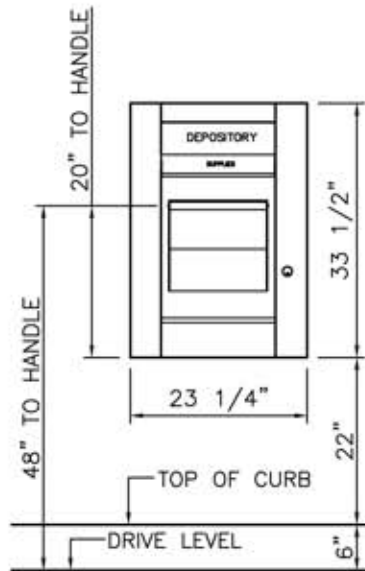


EXTERIOR ELEVATION

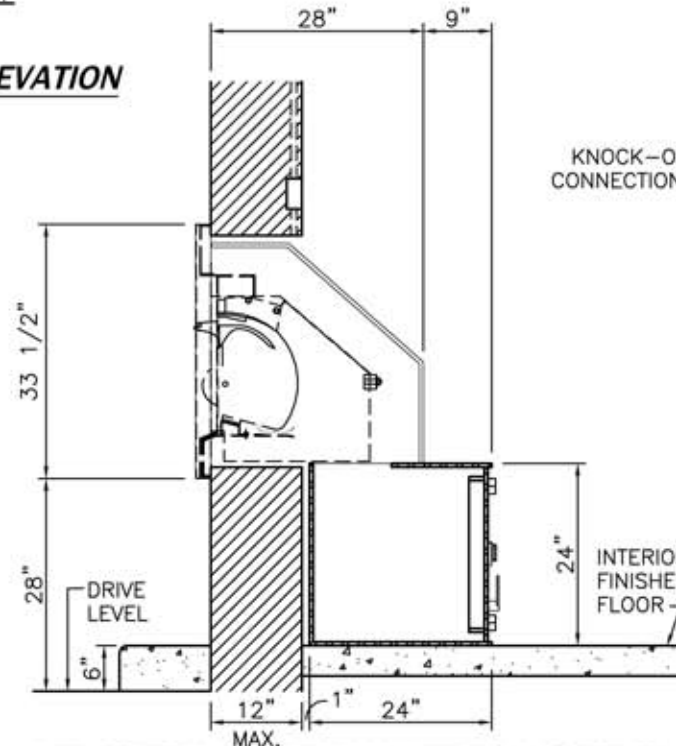

DEPOSITORY ASSEMBLY VERTICAL SECTION

KNOCK-OUT FOR ELECTRICAL
CONNECTION TO LIGHT FIXTURE

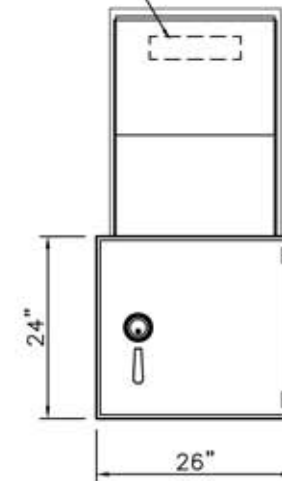


INTERIOR ELEVATION


FINISH: COLOR	DOOR: RIGHT	PREPARED FOR:	DRAWING NAME: 305 Night Depository/24
DRAWN BY: CWP	APPROVED BY:	PROJECT NAME:	DRAWING NUMBER: Bridgeman DU 242624
REVISED: 10/11/06	SHEET: 1 of 1		

SINGLE J-BOX WITH
3/4" CONDUIT AND
COVER PLATE FOR
ALARM AND VIDEO


SINGLE J-BOX WITH
3/4" CONDUIT AND
COVER PLATE FOR
120V 15A SERVICE
TO DEPOSITORY SIGN

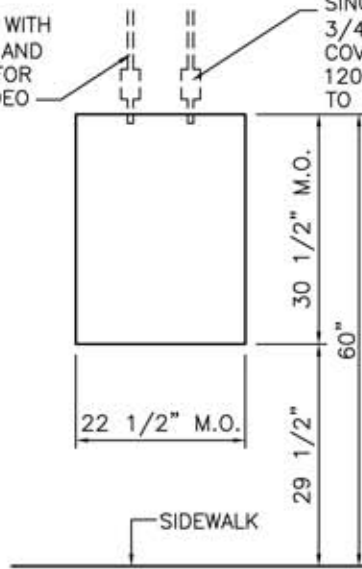

WALL OPENING EXTERIOR ELEVATION

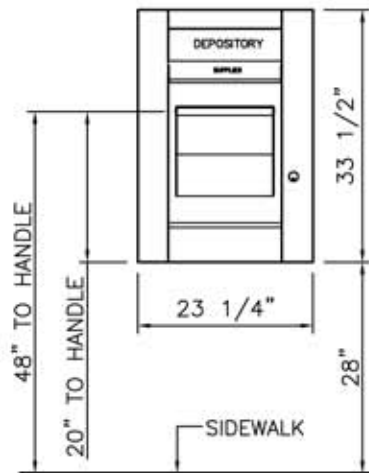

EXTERIOR ELEVATION

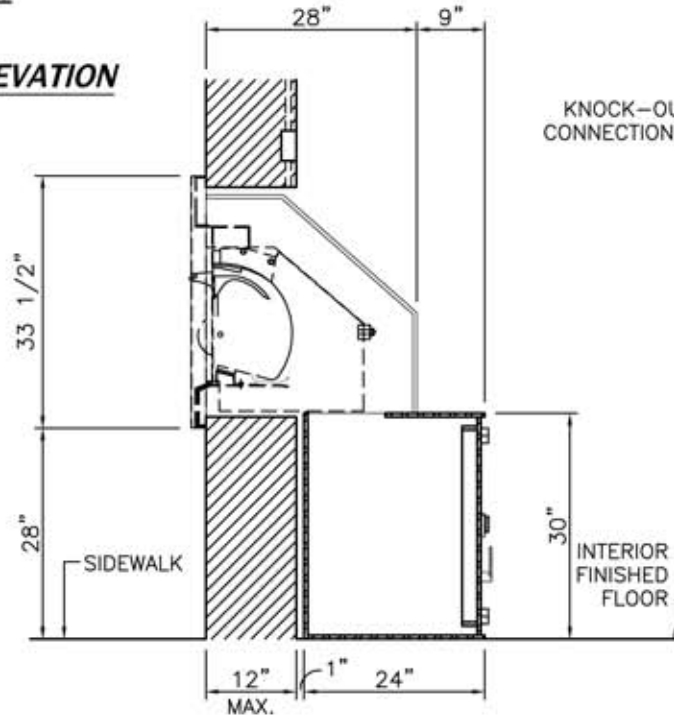


DEPOSITORY ASSEMBLY VERTICAL SECTION

NOTE:

1. IF DRIVE LEVEL AND FINISHED FLOOR ELEVATIONS ARE NOT AS SHOWN NOTIFY FOR SPECIAL CONFIGURATION
2. RECOMMEND NIGHT DEPOSITORY SHOULD BE PLACED UNDER CANOPY
3. HIGH LIGHTING MUST BE PROVIDED
4. RECOMMEND (2) 3/8" BOLTS IN BOTTOM TO ANCHOR SAFE
5. INTERIOR WALL OPENING AROUND OUTER HOUSING IS TO BE FILLED (BY OTHERS) USING APPROPRIATE MATERIALS

KNOCK-OUT FOR ELECTRICAL
CONNECTION TO LIGHT FIXTURE

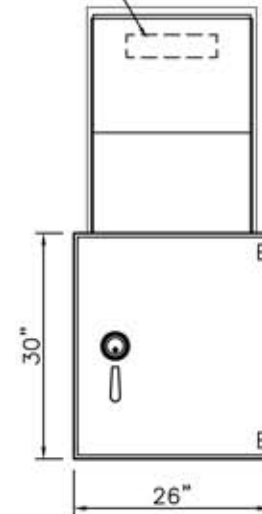

INTERIOR ELEVATION

FINISH: COLOR	DOOR: RIGHT	PREPARED FOR:	DRAWING NAME: 305 Night Depository/30
DRAWN BY: CWP	APPROVED BY:	REVISD: 10/11/06	DRAWING NUMBER: Bridgeman WU 302624
		PROJECT NAME:	SHEET: 1 of 1